




# Jelly

## Tire Mounting Lubricant

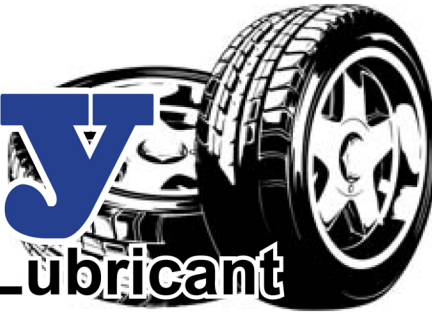

Water-based lubricant for quick mounting and dismounting of tires.  
Viscous formula will not just run off without doing the job.

### ADVANTAGES

- Concentrated. Mixes easily and completely with water. Will not separate.
- Contains rust inhibitor to prevent rusting of rims.
- Tire adheres to rim. Will not slip.
- Helps to seal tire bead. Reduces bead damage.
- Will not gum up the bead or rim to hinder its future use.
- Reduces friction. Saves wear and repair on tire changers.
- Contains no soap or petroleum products.

W1363058 - 5 gallon pail

W1363059 - 55 gallon drum

### DIRECTIONS

Product can be used "as is" or diluted with up to 2 parts water to make the product go further.

#### MOUNTING TIRE

Swab on bead area thoroughly. Mount the tire onto the wheel and inflate.

#### DISMOUNTING TIRE

Swab the bead and rim with enough to assist in easy dismounting of the tire.

### SPECIFICATIONS

|  |                      |
|--|----------------------|
| Physical Form                          | Clear Viscous Liquid |
| Color                                  | Purple               |
| Scent                                  | None                 |
| Specific Gravity                       | 1.00                 |
| Density                                | 8.34 lbs. per gallon |
| Foam Test 1% Solution                  | Initial - 62 mm      |
| pH 2%                                  | 8.39                 |
| Active Alkalinity as Na <sub>2</sub> O | 0.834%               |
| Total Alkalinity as Na <sub>2</sub> O  | 0.854%               |
| Solids                                 | 4.06%                |

**WARNING: May be harmful if swallowed.  
Causes serious eye irritation.  
Keep out of reach of children.**



**The Janitors Supply Co., Inc.**

5005 Speedway Dr.  
Fort Wayne, IN 46825  
260-482-8615

346 Industrial Dr.  
Anderson, IN 46017  
765-378-3306

